

# EasyView™ Lite Series

Indoor Dome Camera

## CD-HD2N-L

## NTSC



### CD-HD2N-L



### KEY FEATURES

- 1/3" CCD Sensor
- 600 TV Lines
- 2.9mm Fixed Lens
- Day/Night Functionality
- 30 IR LEDs
- 0.2 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
- AWB: Automatic Tracking White Balance
- 12VDC

### CONSTRUCTION

- 3" Polycarbonate Bubble
- 3-Axis Gimbal
- Ivory or Black Plastic Housing
- Compact Size

### AVAILABLE MODELS

- CD-HD2N-LI (Ivory Housing) - 2.9mm Fixed, Day/Night, 30 IR LEDs
- CD-HD2N-LB (Black Housing) - 2.9mm Fixed, Day/Night, 30 IR LEDs

### AVAILABLE ACCESSORIES



**CD-WMI200 (Ivory)**  
Indoor Wall Mount



**CD-WMB200 (Black)**  
Indoor Wall Mount


### TECHNICAL SPECIFICATIONS

Technical Specifications	CD-HD2N-L
Video Format	NTSC
Image Sensor	1/3" CCD
Horizontal Resolution	600 TV Lines
Day/Night Functionality	Yes
Lens Type	Fixed 2.9mm
Angle of View	120°
IR LED	30
IR LED Distance	Up to 50ft.
LED Illumination Angle	80°
Sync System	Internal
Effective Pixels	768(H) x 494(V)
Scanning System	525 Lines, 2:1 Interlaced
Electronic Shutter	1/60 ~ 1/100,000 sec.
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	No
Minimum Illumination	0.2 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
S/N Ratio	More than 48dB (AGC Off)
General Information	CD-HD2N-L
Operating Temperature	23°F ~ 113°F (-5°C ~ +45°C)
Operating Humidity	Within 90% RH
Power Consumption	1 Amp (LED On), 500mA (Camera Only)
Input Voltage	12VDC

\*Specifications are subject to change without any prior notice.

### 3-AXIS GIMBAL, SIMPLY MOUNT AND POINT

EasyView™ Lite series cameras all have 3-axis Gimbals with pan, tilt, and rotating ability for easy installation and placement. Simply mount the camera to any sturdy surface, then adjust the Gimbal until the camera points to the area you want monitored.

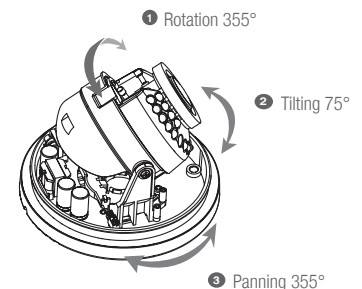

### DIMENSIONS

Unit: Inches (mm)

