




iVIEW Technology Security & Information
CB7-697V

7-series camera

Key Features:

- ◆ 1/3" Color Sony Super HAD
- ◆ Adaptive Tone-curve Reproduction
- ◆ Preset OSD Menu
- ◆ HLC(High Light Compensation)
- ◆ 2D-DNR(Digital Noise Reduction)
- ◆ 3-Axis Mechanism for free lens rotation

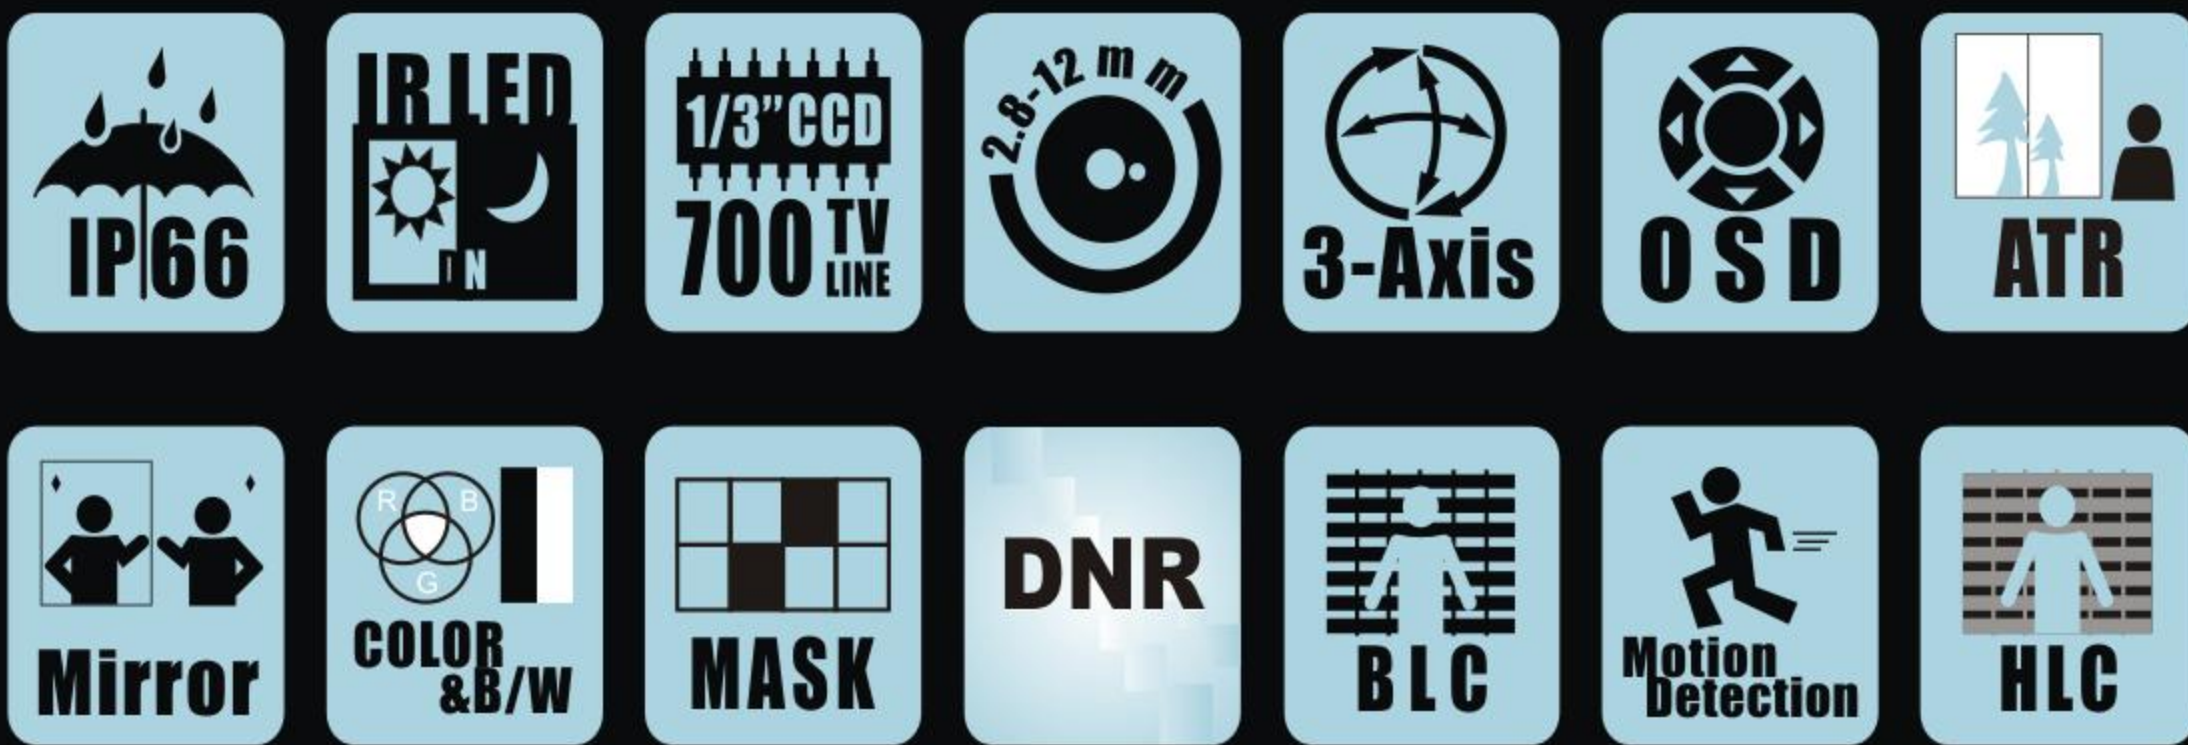



Specifications:

| | |
|-------------------------|---|
| Model | CB7-697V |
| Image Device | 1/3" Color Sony Super HAD |
| Picture Elements | NTSC:976x494 PAL:976x582(H*V) |
| Resolution | 700 TV Line |
| Min. Illumination | 0Lux (IR on) |
| S/N Ratio | More than 52dB |
| Electronic Shutter | NTSC:1/60~1/100,000, PAL:1/50~1/100,000 |
| Flickerless Mode | On/Off (NTSC:1/100, PAL:1/120) |
| Gamma | 0.45 |
| Lens Furnished | Varifocal Lens 2.8-12mm |
| Digital Noise Reduction | 2D DNR |
| Wide Dynamic Range | ATR (On / Off) |
| White Balance | OSD adjustment |
| OSD menu | 8 languages |
| Sync. System | Internal |
| Back Light Compensation | OFF (Default) / BLC / HLC |
| Flickerless | Yes |
| Day & Night | Color / BW / Auto Switch |
| Mirror | Yes (Default: OFF) |
| Privacy Masking | 4 zone (Default: OFF) |
| Motion Detection | 24×16 blocks (Default: OFF) |
| Gain Control | Auto / Manual |
| Infrared Luminary | 3pcs 3rd Generation (Lattice type)IR-LED(850nm) |
| Illumination Distance | 50 M |
| Weatherproofing | IP 66 |
| Power Supply | DC12V±10% |
| Power Consumption | IR On: 750mA max, IR Off: 100mA max |
| Video Output | 1Vp-p / 75 Ohms |
| Operating Temp. | - 10°C ~ 50°C |
| Storage Temp. | - 30°C ~ 60°C |

The Specifications are subject to change without prior notice.



Dimensions:

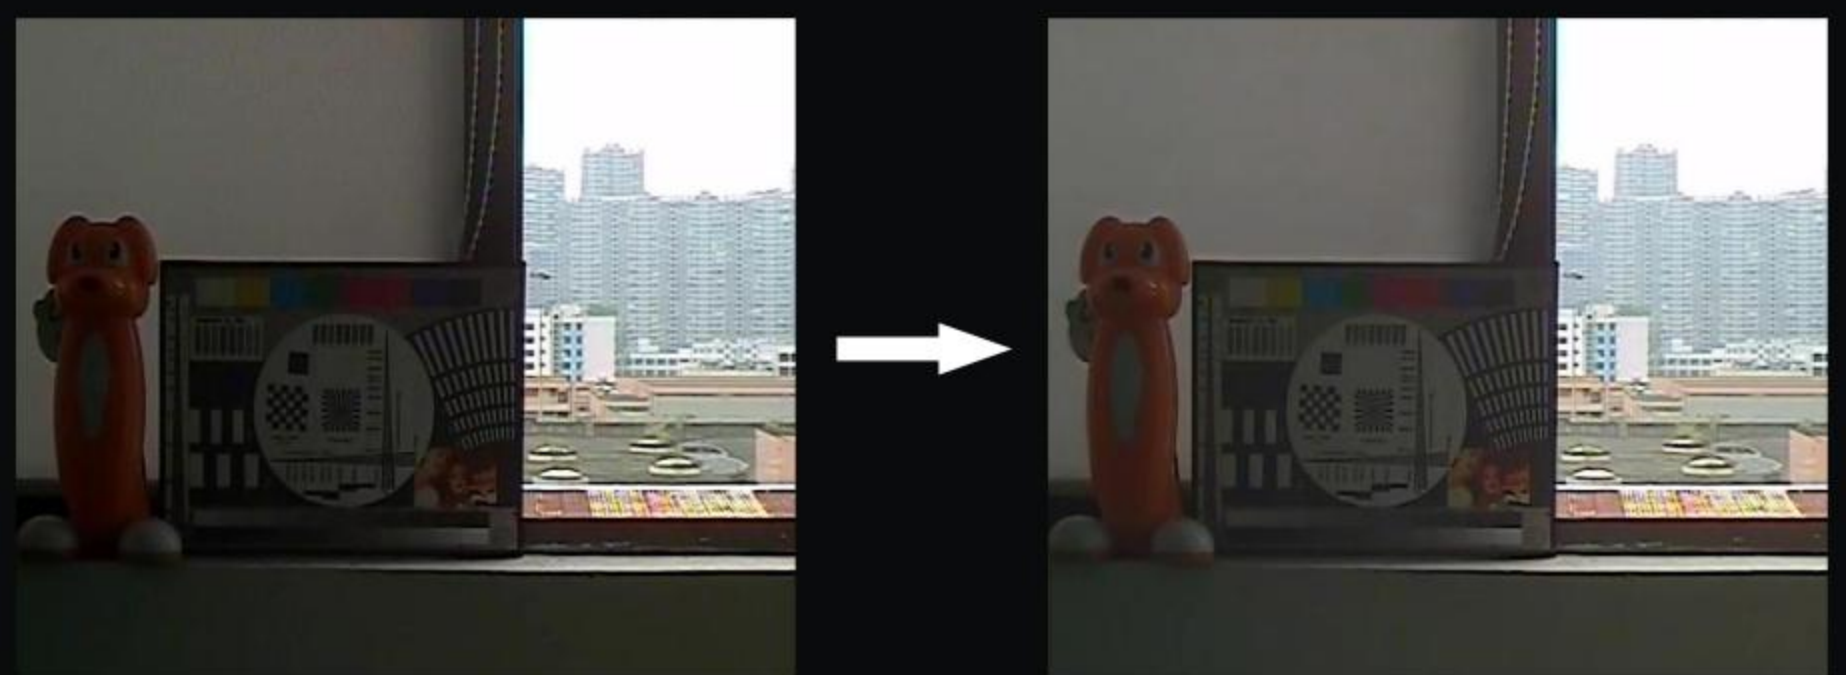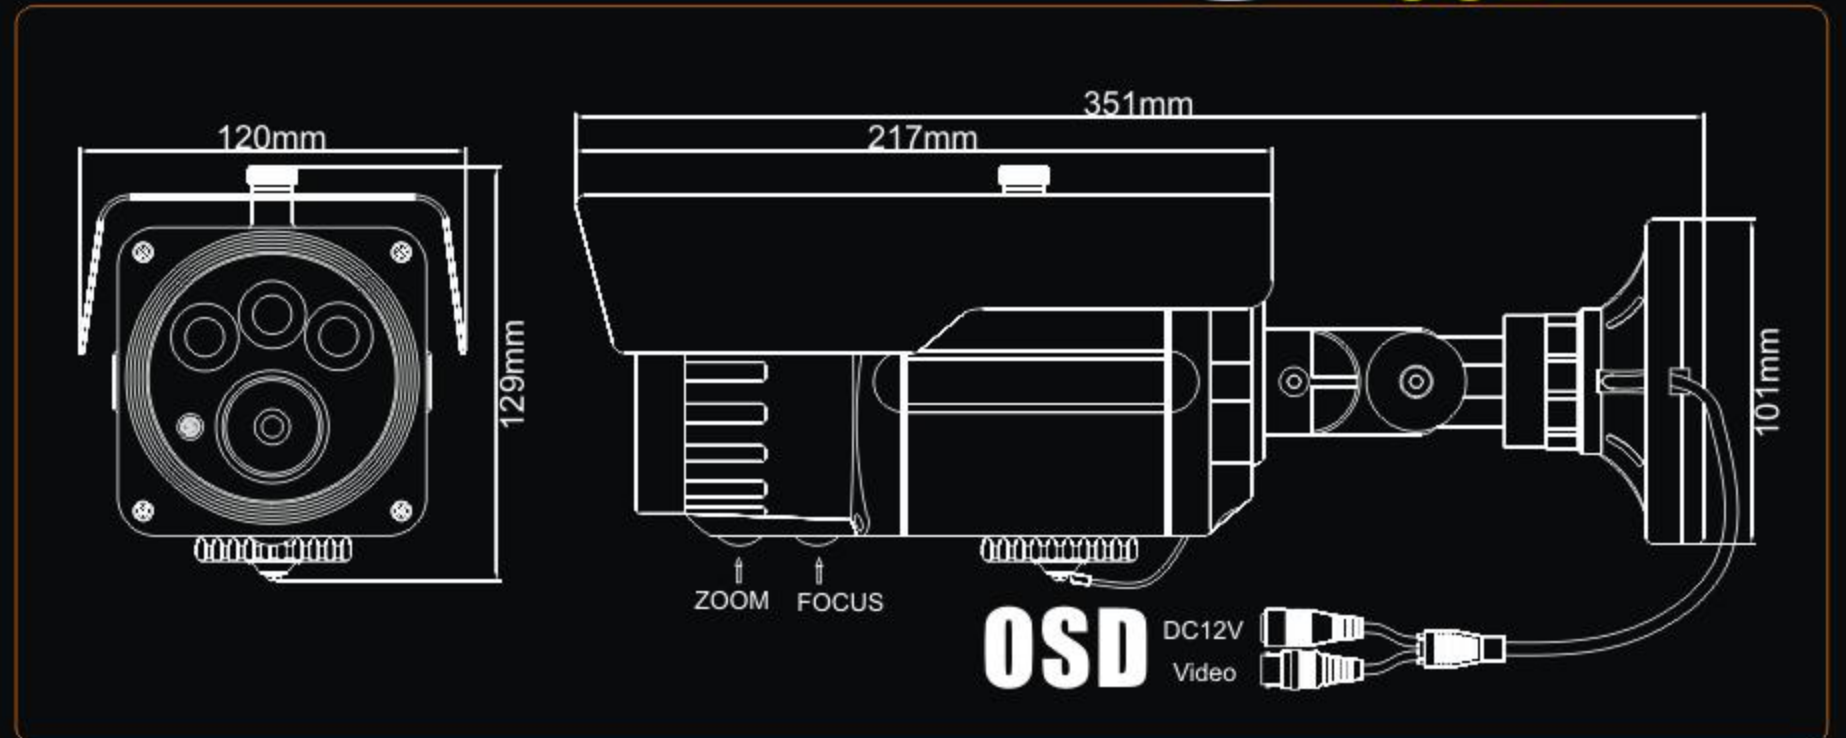

ATR OFF

ATR ON



DNR OFF

DNR ON



HLC OFF

HLC ON

Color Option:

