













Is your fingerprint damaged due to injuries? We think ahead. Our device has password and RFID card verification to fall back on should your fingerprint fail to be read.



Camera

Don't compromise on security! Every time a user attempts to verify into an authorized area, this hi-tech camera captures a photo of the user. This feature is useful in warding off vandals, and in duress situations.



Wireless Data Management

That's right. With the USB flashdisk port and the Wi-Fi data communication, syncing of data can now be done without any wiring hassle.



Supersized Capacity

Get up to 10,000 fingerprint templates and 200,000 transaction logs – more than enough to fulfill the requirements of an SME.



Shortcut Keys

Program these keys to take you to commonly used functions in just one step. Did we mention that we make things easy?



T9 Input Method

Reduce your time and effort by using the T9 method of typing when doing data input. With T9 Input, you just need to press a button once for the alphabet that your want.



Mini TV

Take your full colour touch screen display to the next level. Display a company ad, corporate song, or even a short entertaining clip for your customers/guests to view in your waiting room.



Manage Your Data Easily

Administration is easy with the bundled software! FingerTec's TCMS software allows you to generate reports, monitor attendance and integrate FingerTec with a third party system

WEB LINK



• http://info.fingertec.com/ikiosk100p-1



Quick Start Guide

• http://info.fingertec.com/ikiosk100p-2



/ Installation Guide

• http://info.fingertec.com/ikiosk100p-3



? User Guide

• http://info.fingertec.com/ikiosk100p-4



Video Guide

• http://info.fingertec.com/ikiosk100p-5



Technical Tips


• http://info.fingertec.com/ikiosk100p-6




Packaging

Dimension (mm) : 350(L) x 90(W) x 300(H)

LAYOUT PLAN

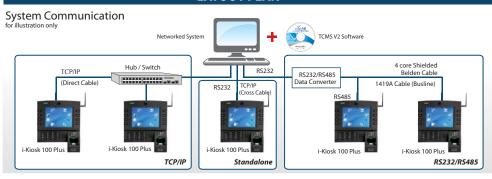

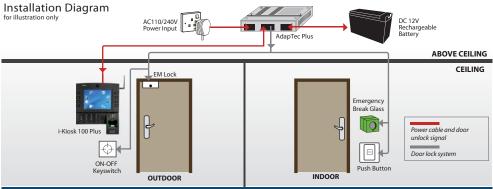

SPECIFICATIONS	
MODEL	i-Kiosk 100 Plus
SURFACE FINISHING	Acrylonitrile Butadiene Styrene (ABS)
TYPE OF SCANNER	Optical
PROCESSOR	600 MHz microprocessor
MEMORY	256MB flash memory & 1GB SDRAM
ALGORITHM	BioBridge VX 9.0 / VX 10.0
PRODUCT DIMENSION (L X W X H), mm	260 x 70 x 320
STORAGE	
Fingerprint templates	10000
Transaction	200000
ENROLLMENT & VERIFICATION	
Methods	Fingerprint (1:1, 1:N), Password & Card
Recommended fingerprint per user ID	2
Fingerprint placement	Any angle
Verification time (sec)	<1
• FAR (%)	< 0.0001
• FRR (%)	<1
CARD TECHNOLOGY	
• RFID: 64-bit, 125kHz	Yes
• MIFARE: MFIS50/S70, 13.56MHz	Made to order
• HID: HID 1325, 26-bit, 125kHz	Made to order
COMMUNICATIONS	
• Method	TCP/IP, RS232, RS485, USB flash disk & WiFi
Baud rates	9600, 19200, 38400, 57600, 115200
• Wiegand	26-bit input/output
OPERATING ENVIRONMENT	
• Temperature (°C)	0 ~ 45
• Humidity (%)	20 ~ 80
Power input	DC12V 3A
TIME ATTENDANCE	
• Siren	Built- in
• Work codes	Yes
MULTIMEDIA	
• Voice	Yes
• Display	8.0" 65k color TFT touch screen panel
• Short messaging	Yes
• Music playback	Yes
Movie playback	Yes (DECENTION ALL)
• Internal backup battery	Yes (DC12V, 2000mAh)
ACCESS CONTROL	DC13V3A / Palay autout
• EM lock driving output	DC12V 3A / Relay output
• Alarm output	NO / NC Yes
• Antipassback	
VOICE / DISPLAY LANGUAGE (TERMINAL)	English (Standard) / Other languages are available upon request.
SOFTWARE LANGUAGE	English, Arabic, Malay, Indonesian, Chinese (Traditional), Chinese (Simplified), Thai, Spanish, Portuguese (Brazil), Polish, Vietnamese, French, Russian, Persian, German, Italian, Turkish









Authorized Reseller: